





2500HP SERIES CURTAIN WALL WIND LOAD CHARTS



F25

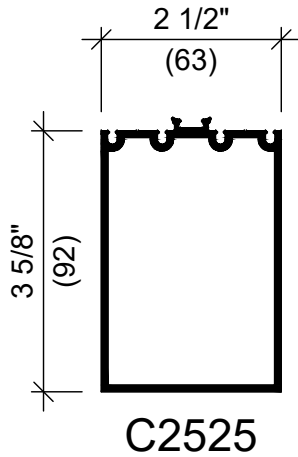

- ① - 1.92 kPa (40 PSF)
- ② - 1.68 kPa (35 PSF)
- ③ - 1.44 kPa (30 PSF)
- ④ - 1.20 kPa (25 PSF)
- ⑤ - .96 kPa (20 PSF)
- ⑥ - .72 kPa (15 PSF)

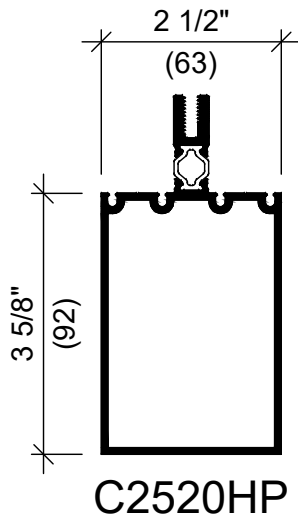

DEFLECTION CRITERION:
L/175 OR L/240+1/4"

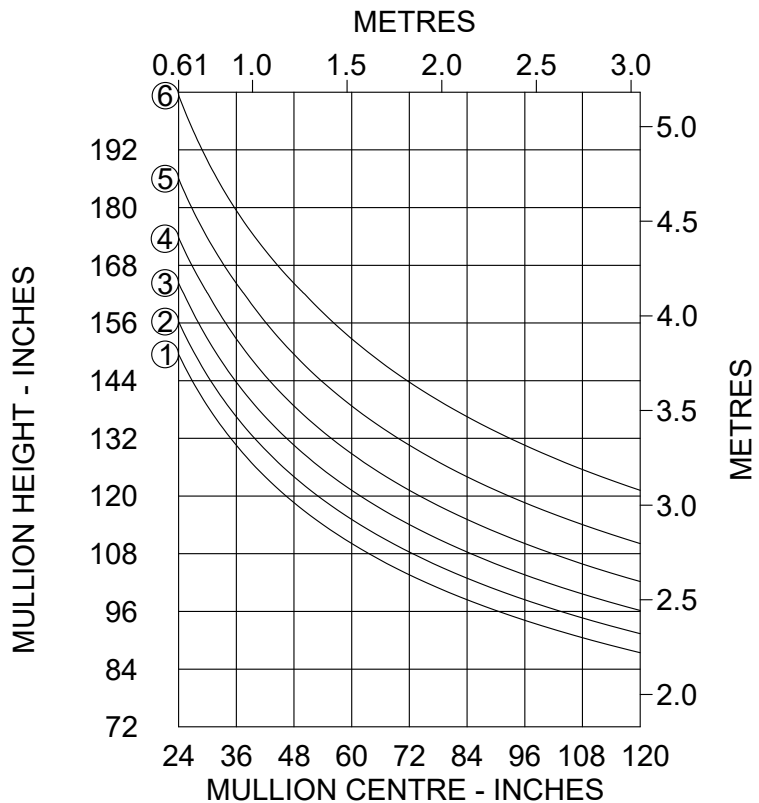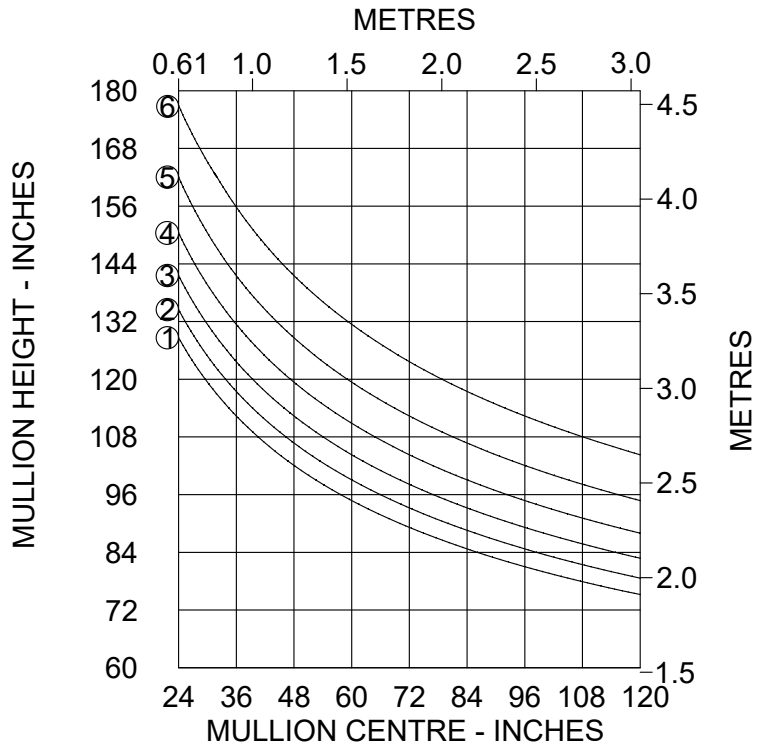

Clearly Exceptional

Providing innovative solutions that meet client needs | desa.ca